



Foldable Timber Clothes Dryer Assembly Manual

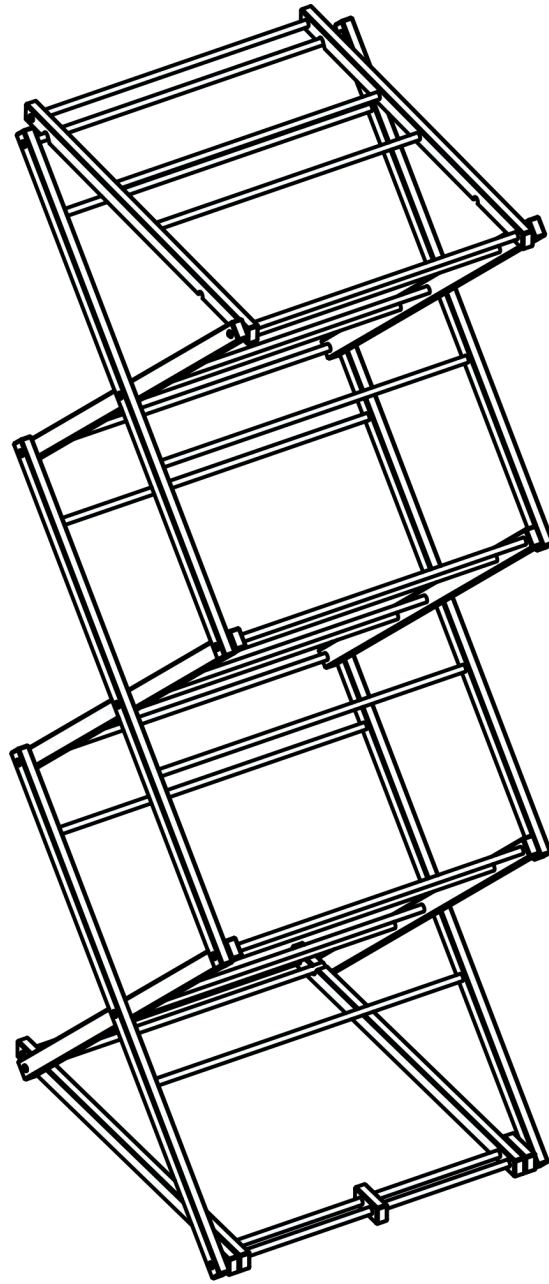


Welcome!

Before you begin, make sure you have 45 minutes to dedicate to assembling this product. We recommend you to do the assembly on a carpet. Doing it with another person makes the process easier.


To begin, we are going to sort out all pieces by type. Align them on the floor as you go through it. First, there is a bag of screws and a screwdriver. Make sure you save these. You will use them at the very end.

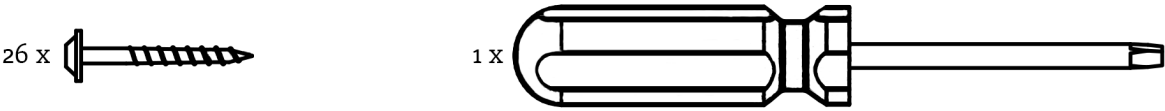


The rest is made of pieces of wood, all different. There are four types of dowels:

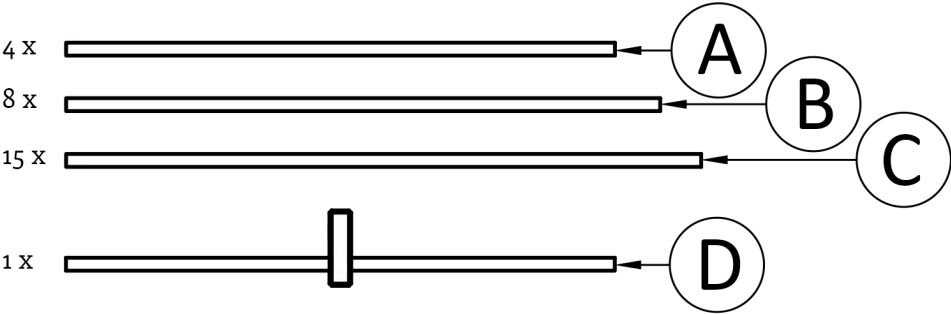


There are also four short bars :

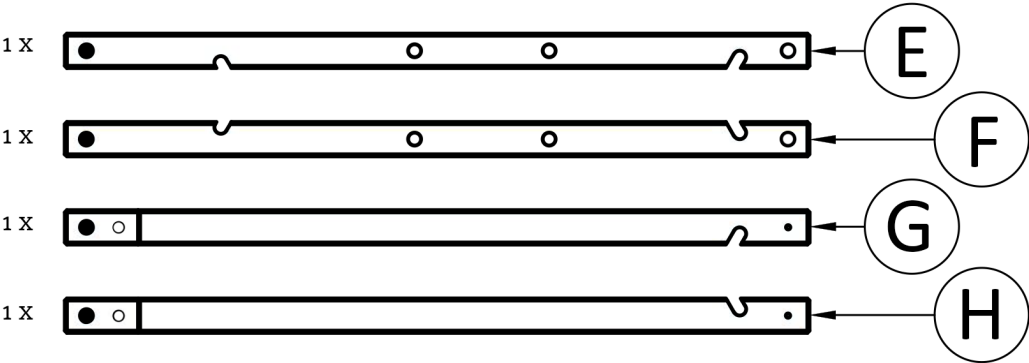

Finally there are 4 types of long bars. The first one has no large holes going through. The second one has three large holes going through :

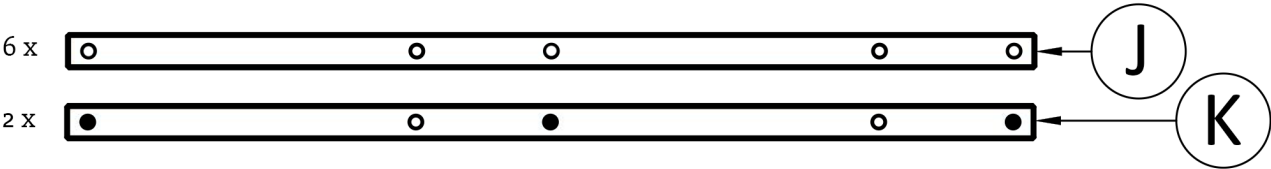


The third and fourth are a little harder to tell apart. Place the bars side by side. You will notice that, on one end, there is a hole by itself. In one beam, the hole goes through, and not on the other. See the blue circle below :

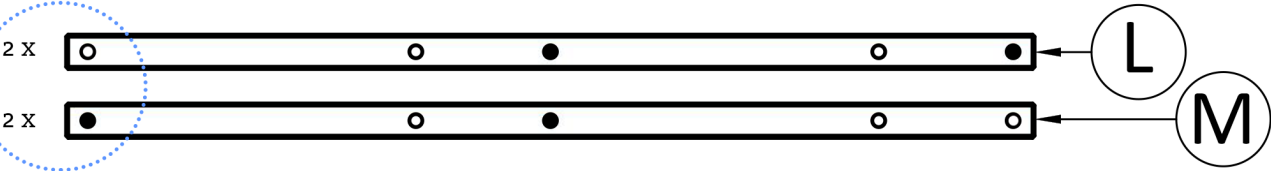


Excellent! Now we will start the assembly. We are going to build 5 separate parts that we will add together at the end.

We will begin with the “base”. To assemble it, you will have to gently seat the bar onto the dowels by bumping it with your fist, or use a hammer with a soft layer, such as a towel, on top of the beam. You will use this method throughout the assembly process. Follow these steps :

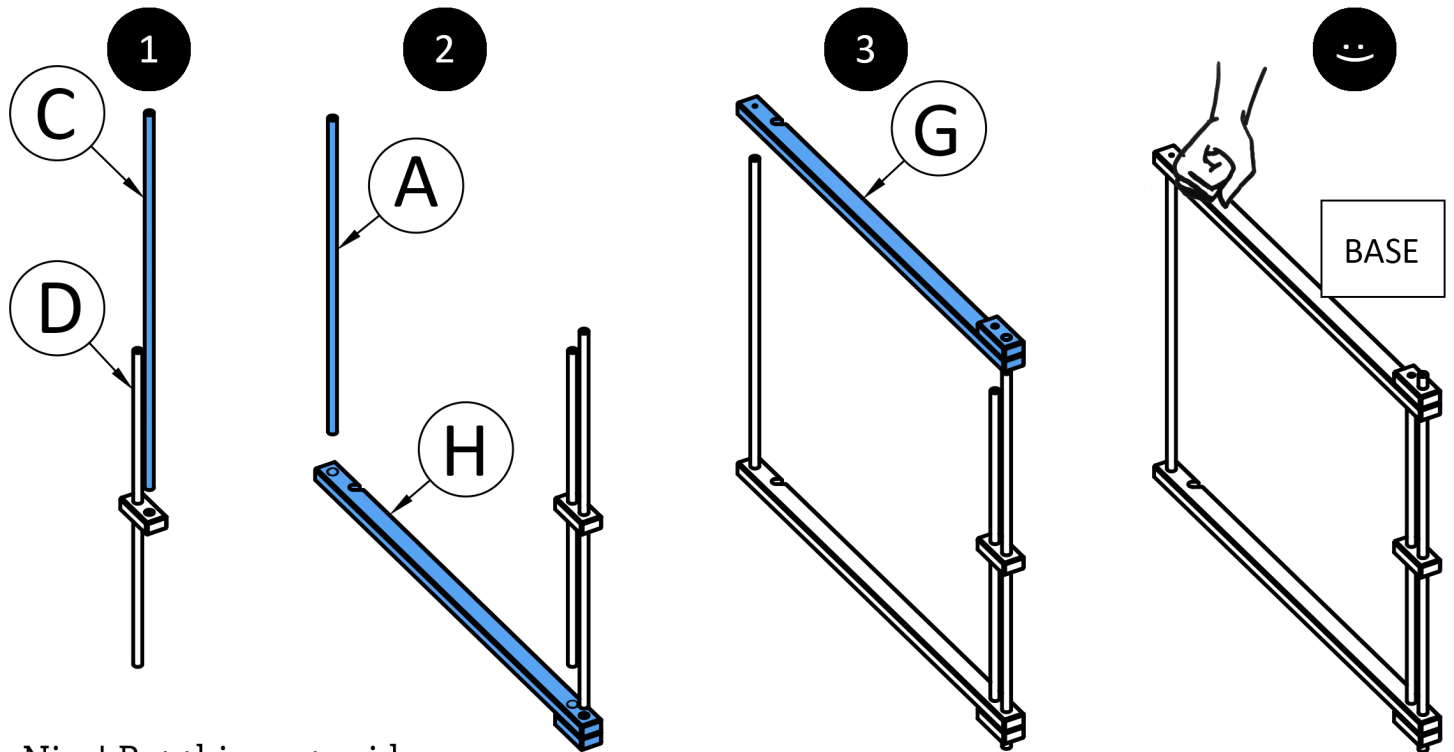







Nice! Put this part aside.

Now we will build the “top”. The steps are similar. This time, there are four dowels to fit in. To do so, start fitting the dowel on one end, then work your way through to the other end. If you have someone helping, we recommend having one person bumping the bar into place while the other keeps the rest of the dowels aligned :


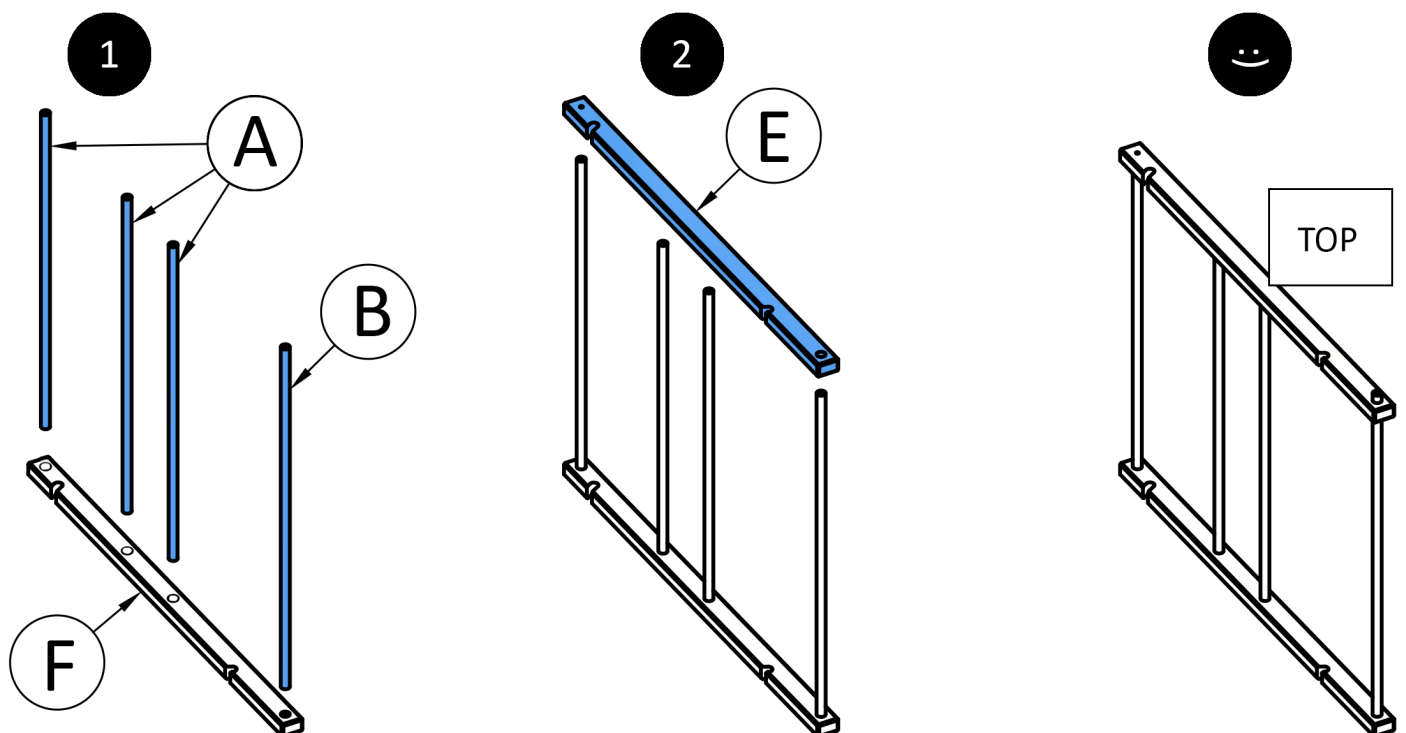




Put this part aside.

The next two parts are similar, but not identical. Follow these steps :

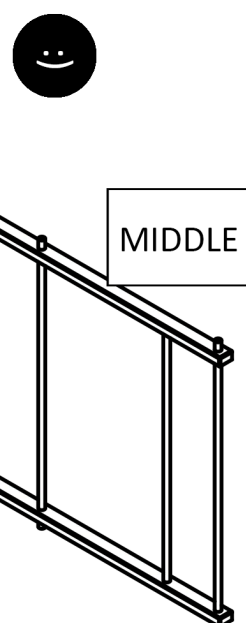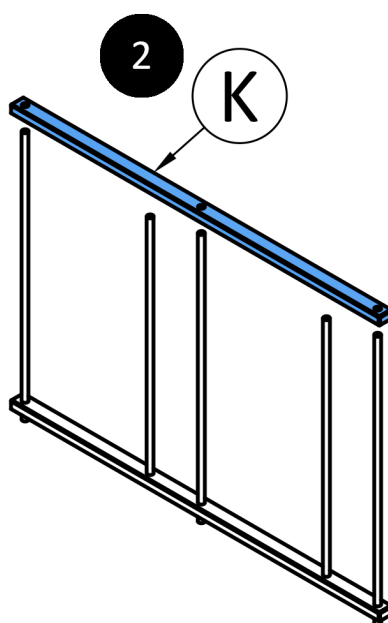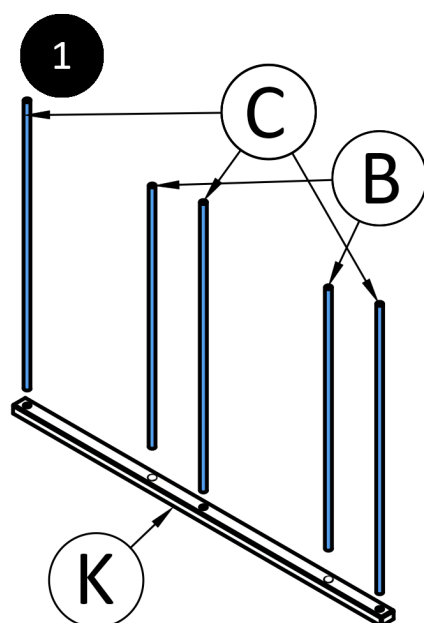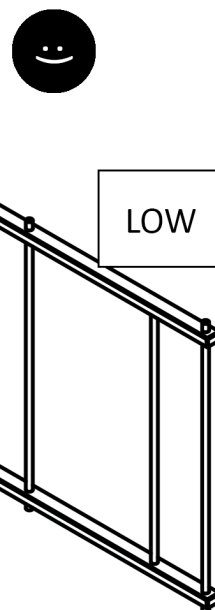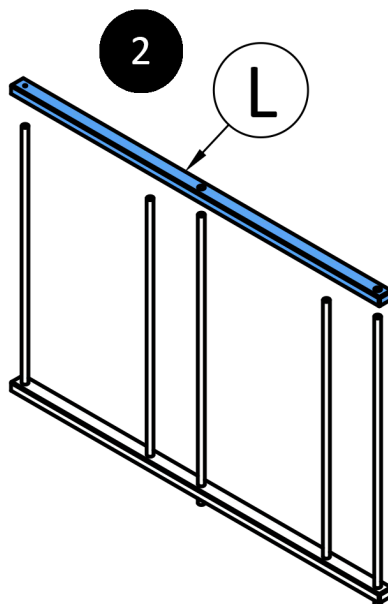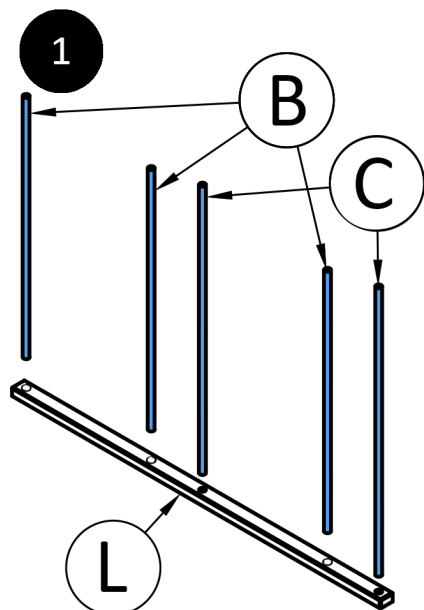


This part is the last one. It uses the “top” part you made earlier as a dowel.
Follow these steps :

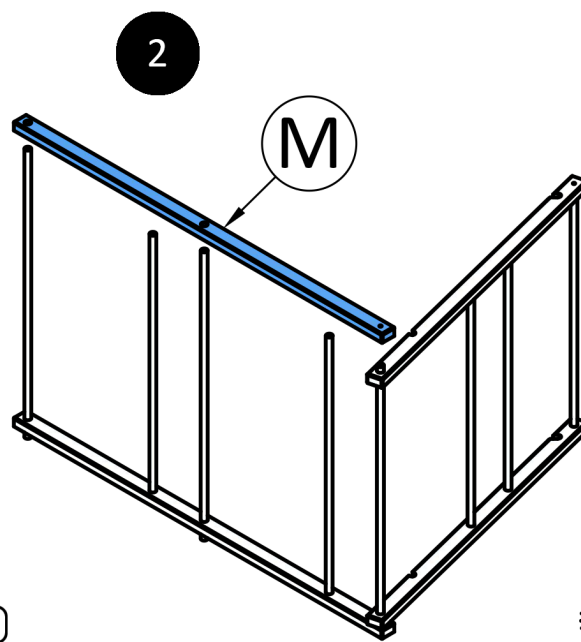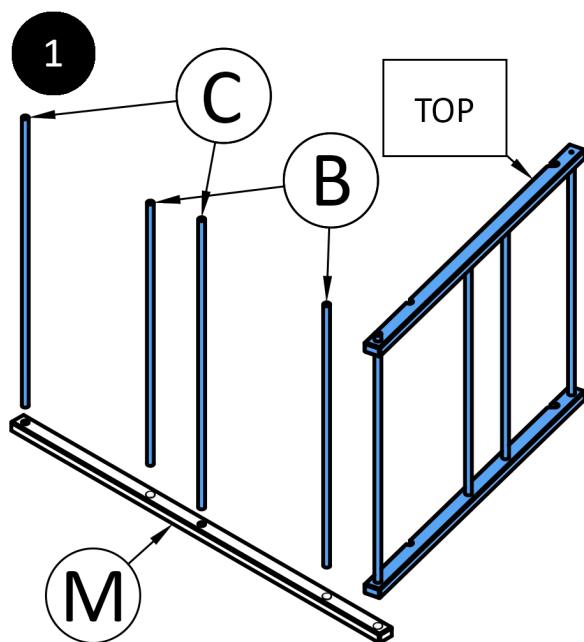


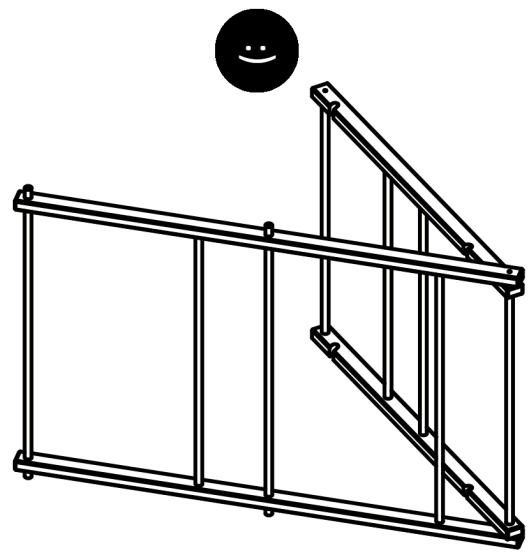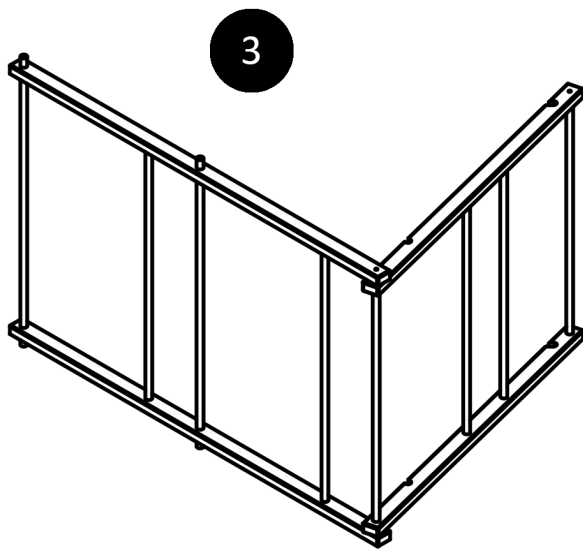


Great! All parts are ready. In the final step, we are going to assemble them. Take two of the remaining bars and put them on the floor, then add the “middle” section on top of it :

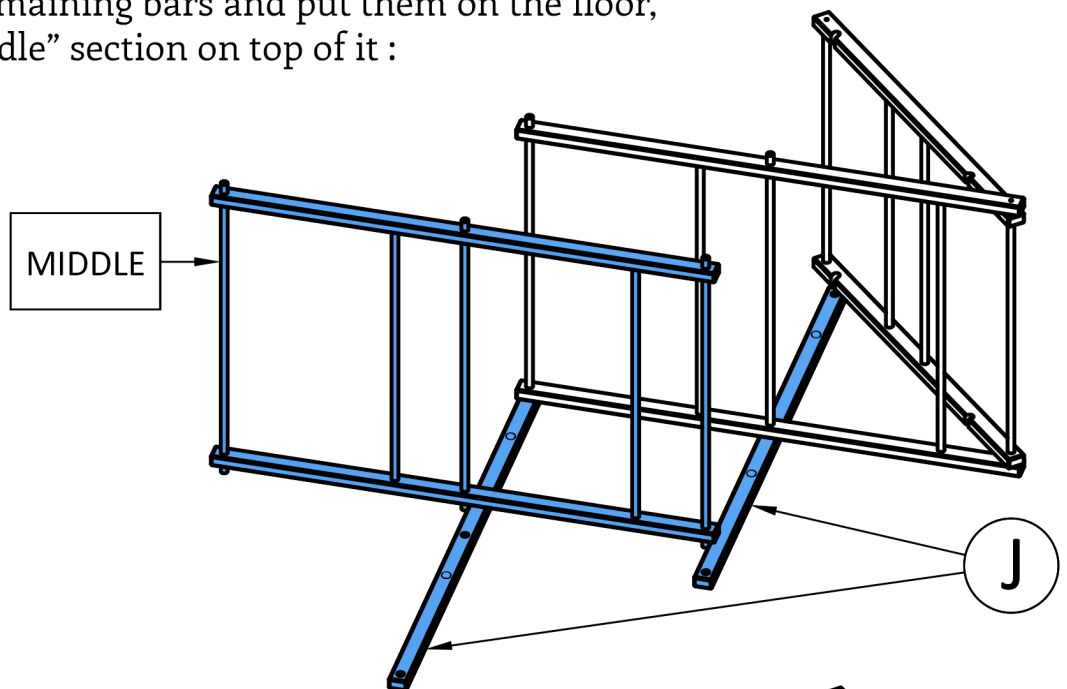

Put one other remaining bar on the floor and place the “low” section on top of it:

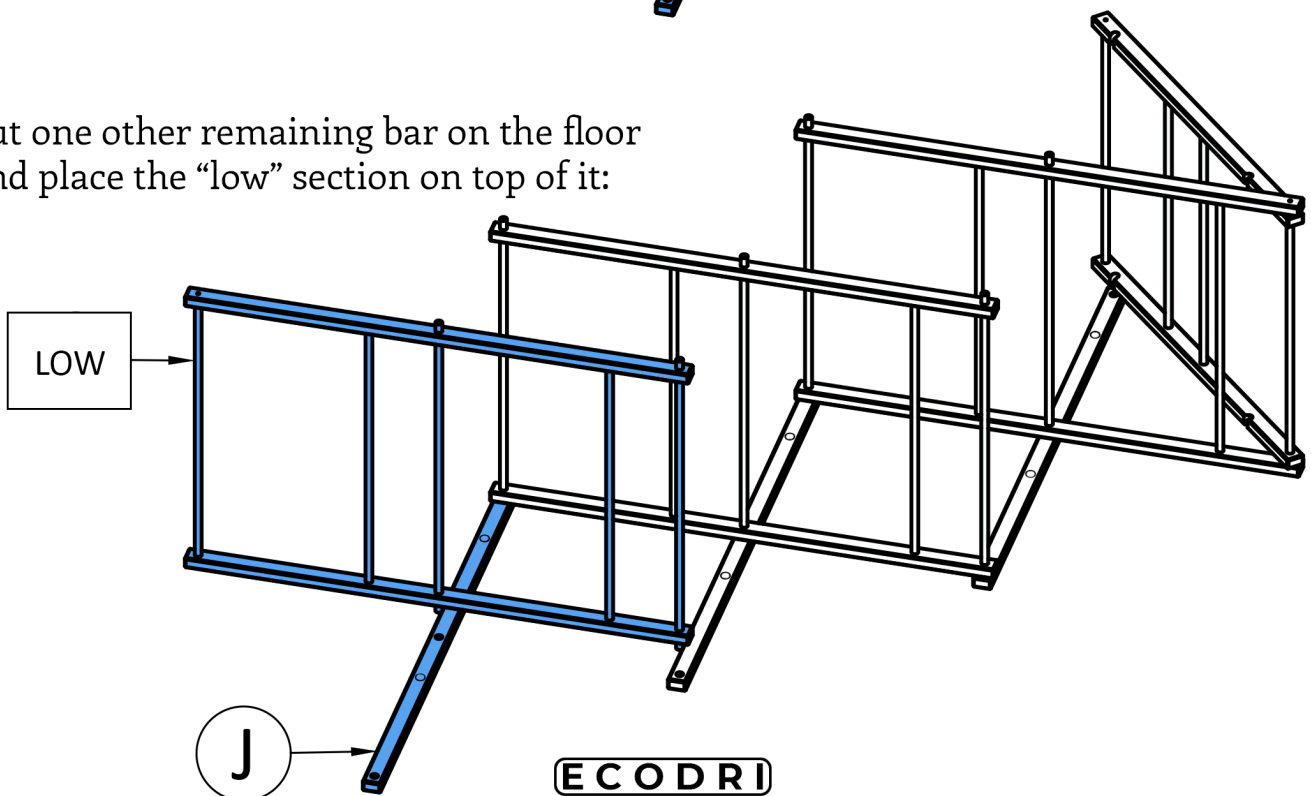


Take the remaining dowels and the “base” part, and place them in the holes that are free :

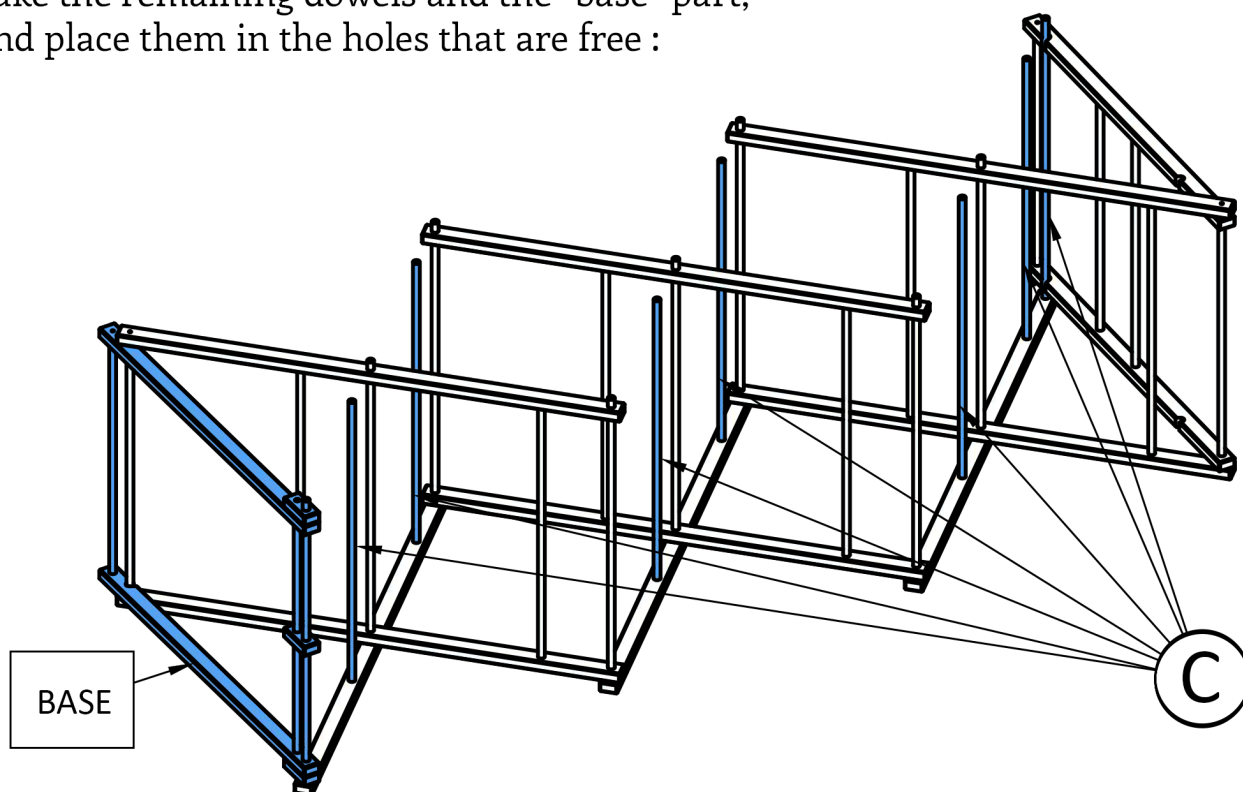


It is almost the end! Now take the three remaining bars and place them on top, aligning all dowels with the holes. Take your time, as this can be a little tricky. If possible, ask another person to help you.

Remember : work from one end to the other.

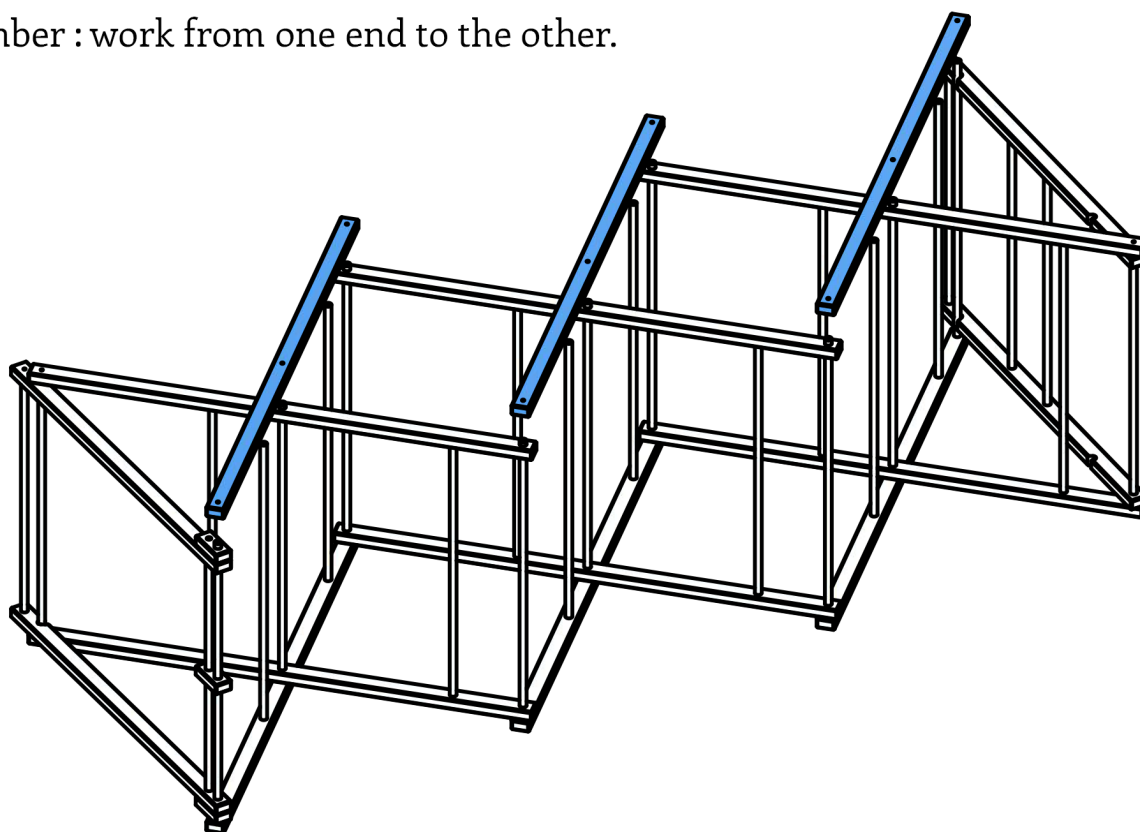

You can now screw the dryer together. Start with one side. One person can hold on to the dowel while the other screws it in. Ensure the screws firmly seat the bar onto the dowels. Then turn the structure over, and do the same on the other side :

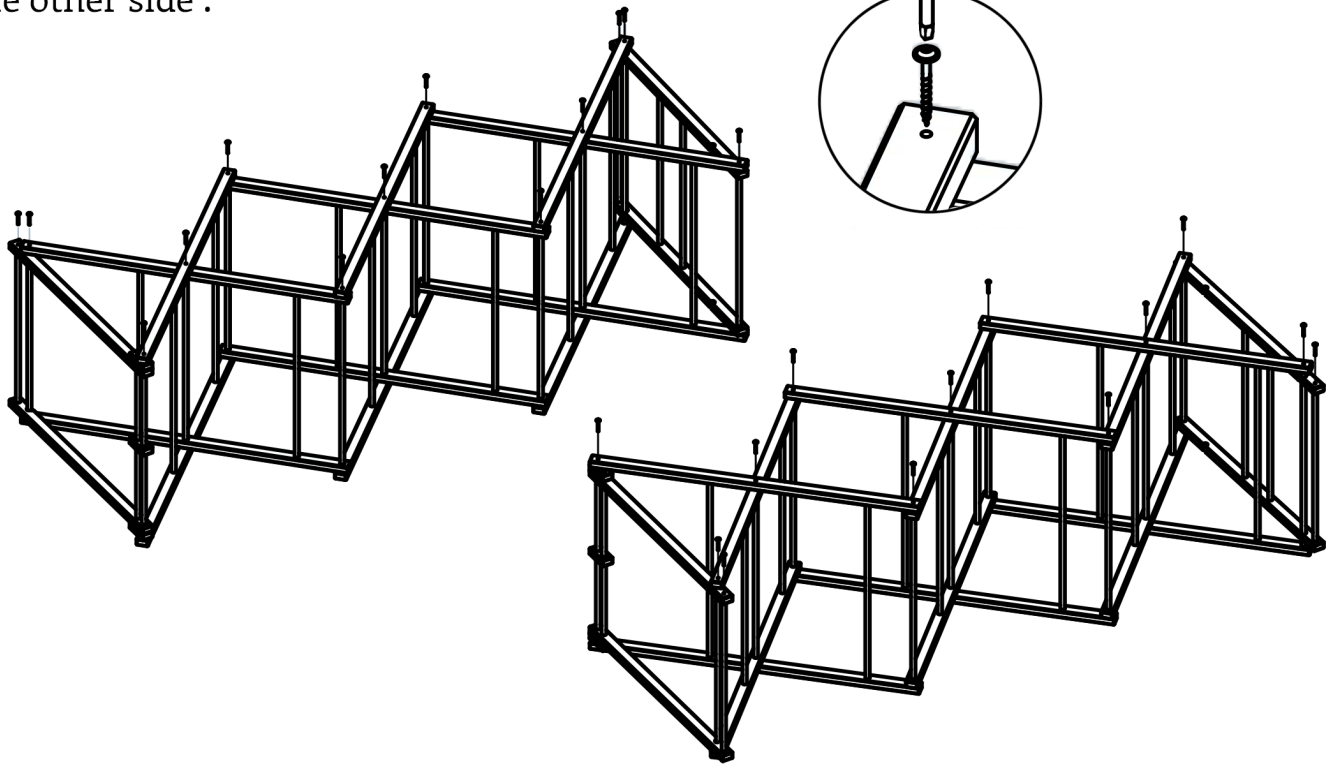

The drying rack is ready for use. Congratulations! Enjoy!

To Stand Up Position:

- Place timber clothes dryer on floor with safety latch end facing you.
- Hold both safety latch bar and top bar.
- Raise timber clothes dryer to stand up position and engage safety latch slots to top bar.
- Ensure that both top and bottom bar are engaged into the safety latch slots.
Caution : Safety latch top bar slots must be engaged before bottom bar slots.

To Fold Down Position:

- Hold both safety latch bar and top bar, raise top bar of clothes dryer up enough to release safety latch from slots, this will also release bottom bar from slots.
- Lower timber clothes dryer to floor.

Note: Some initial stiffness may occur with timber when standing up and folding down, this will ease with use.

If you have any comments, feedback, contact us at sbs.ltd@xtra.co.nz.

The team at Ecodri